


Purefer®

Sediment Filters

PP Filter Series

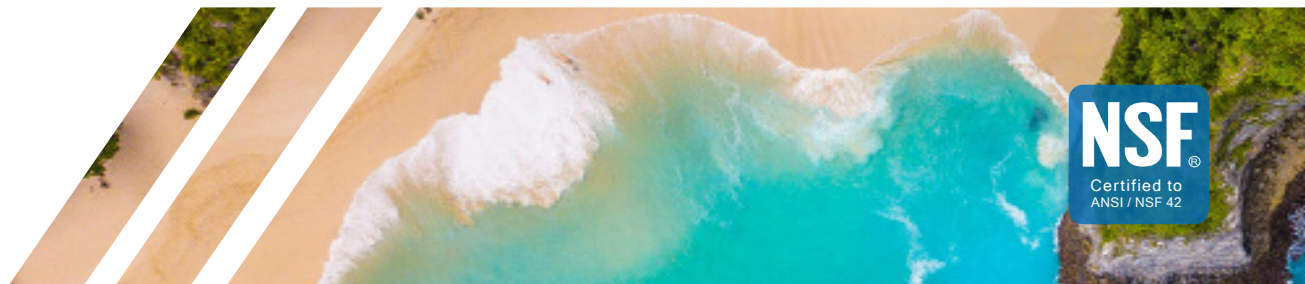

Features

- 100% virgin polypropylene
- Available in 10", 20", 30", 40" standard and jumbo sizes
- Available in 1, 5, 10, 20 micron nominal ratings
- No chemicals are used, meaning zero secondary contamination
- Single nozzle design ensures even material density and optimum filtration efficiency
- Grooved surface option available for 1 & 5 micron rated 10" standard PP filters

Applications

- Removes sediment, dirt, rust, and other suspended particles
- Reverse osmosis system prefilter
- Prefilter for domestic or commercial water filter systems
- Standalone point-of-entry or point-of-use sediment filtration

Specifications

Materials	100% virgin polypropylene					
Dimensions	Series	Length	Width	Series	Length	Width
	10" Standard	10"	2.5"	10" Jumbo	10"	4.5"
	20" Standard	20"	2.5"	20" Jumbo	20"	4.5"
Minimum temperature	40°F 4.4°C					
Maximum temperature	145°F 62.8°C					
Recommended replaceable pressure drop	21 psi 1.5 bar					
Nominal ratings	1, 5, 10, and 20 micron					
Maximum flow speed (depending on model)	5-20 gal/min 19-75 L/min					

